




*2 years Parts and Labour, 3 years parts only

WarmCair C26D Internal view

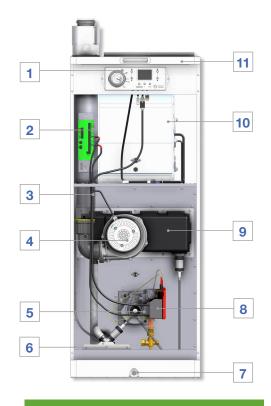

SINGLE ZONE WIRELESS THERMOSTAT

Taking care of your comfort and helping you save money on your energy bills by allowing you to control your heating schedule, no matter where you are. Ask your installer for more details.



CLEANFLOW ELECTRONIC AIR FILTRATION

With a warm air system, the air within the dwelling passes across the air filters around 6 times per hour.

This presents the perfect opportunity to electronically clean the air and remove smaller particles such as pollen, mould and tobacco smoke.



Ideal for houses with pets, smokers, and people suffering from asthma and other bronchial conditions.

DOWNFLOW MODEL SHOWN

- 1 MMI Control panel with time control
- 2 Electrical panel
- 3 Sliding flue connector
- Combustion air fan assembly

lohnson

- 5 Gas valve/venturi with burner
- 6 Integral condensate pump
- Duct temperature sensor
- 8 ESYS PCB

- 9 Flue collector box
- 10 EC Air circulation fan
- 11 Air filter

TECHNICAL DATA		Output kW	Dimensions H x W x D	Flue Diameter
DOWNFLOW	C10D	9.0	1200 x 300 x 550	60/100mm
	C16D	15.0	1200 x 400 x 665	60/100mm
	C26D	23.0	1200 x 485 x 665	60/100mm
UPFLOW	C16U	14.0	1200 x 400 x 665	60/100mm

In the interest of continuous development Johnson & Starley reserve the right to change specification and/or guarantee periods without prior notice. To view the full Terms & Conditions of our guarantees please visit our website.

